



Drain Connector
MAS

- + For connection of SMU to plastic pipes
- + Internal seal
- + Resistant to 0.5 bar
- + Easy & quick installation

Drain connector MAS - for internal connection of SML pipes to plastic pipes

The connector is made of a high-quality EPDM sealing material, which is characterised by durability and has a noise-reducing effect in downpipes.

It is suitable for flush mounting as well as for use with exposed pipe connections.



INSTALLATION



Position pipe ends.




Press the drain connector into the plastic socket as far as it will go. Lip seal in plastic socket does not need to be removed.



Push the SMU-pipe into the drain connector.

DESCRIPTION

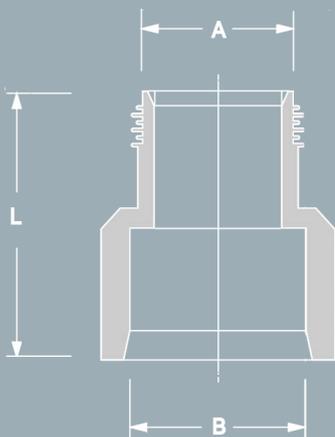

TECHNICAL SPECIFICATION

Drain connector MAS - for internal connection of SML pipes to plastic pipes.

Pipe 1 DN/Material _____
Pipe 2 DN/Material _____

Article Number _____
Qty Price/Unit Total

Manufacturer: MÜCHER DICHTUNGEN®, 50226 Frechen, T +49 2234 928 03-0, F-55
Pressure Tightness: -0.5 bar water / -0.3 bar vacuum
Sealing Material: EPDM according to DIN EN 681-1
Temperature Resistance: -40°C to +120°C, temporary max. temperature +160°
UV-/Ozone Resistance: C Resistant to UV radiation and ozone
Standard/Approval: DIN EN 681-1



PRODUCT RANGE

| DRAIN CONNECTOR MAS | | | | | |
|---------------------|-----------------------------|-------------------------|-------------------------|---------------------|-------------|
| ArticleNumber | Reference | A Size Range (mm) | B Size Range (mm) | L Length (mm) | Weight (kg) |
| 500127 | Drain Connector MAS, DN 50 | 50+0,3/-0 | 58+2/-1 | 92 | 0,15 |
| 500128 | Drain Connector MAS, DN 70 | 75+0,4/-0 | 78+2/-1 | 103 | 0,25 |
| 500129 | Drain Connector MAS, DN 100 | 110+0,4/-0 | 110+2/-1 | 116 | 0,4 |